


- Designed to meet UL 60950
- Working voltage up to 250Vrms
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot		
MD2290WNL	(1-4):(8-5),(tie2+3,6+7)	(1-4),(tie2+3)	(1-4),(tie(2+3,5+6+7+8)	PRI TO SEC		
	1.4:1 ±2%	430μH±10%	1.5μH MAX	1875VAC ,1mA,2s		
	DCR		CWW@10KHz 0.1V	THD@30KHz 3V	LB	
	(1-4),(tie2+3)	(8-5),(tie6+7)	(1-8),(tie2+3,6+7)	/	12MHz	17MHz
	1.2Ω MAX	1.2Ω MAX	50PF MAX	-60dB MAX	-45dB	-42dB

DIMENSIONS (unit: inch/mm):

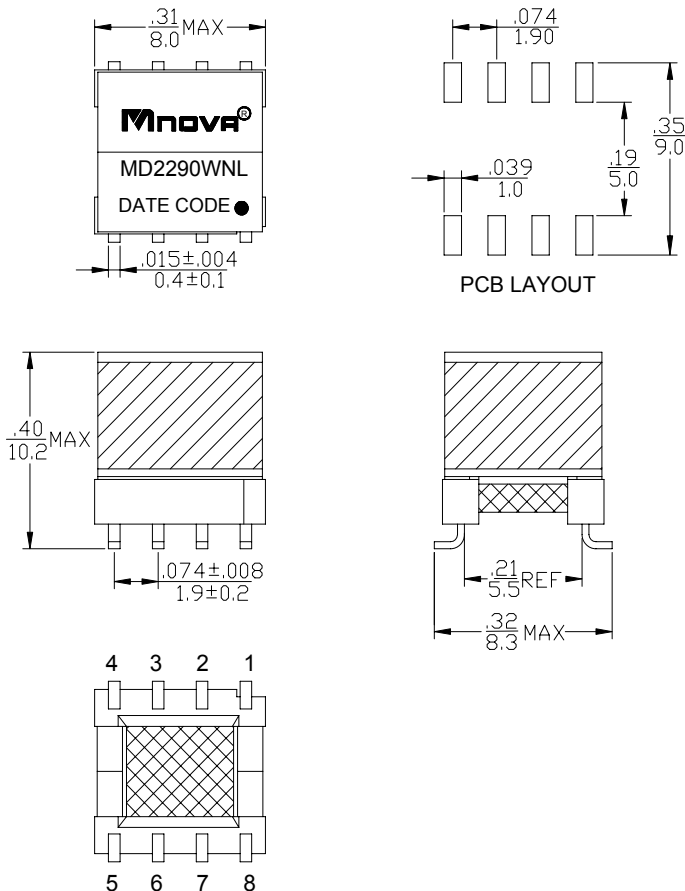

SCHEMATICS:

