


- Designed to meet UL 60950
- Working voltage up to 250Vrms
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



### Electrical Specifications @ 25°C

P/N	T/R			OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot
MP0626ENL	(1-5):(10-6) (tie2+4,7+9)	(10-7):(9-6)	(1-4):(2-5)	(1-5),(tie2+4)	(1-5) (tie 2+4,10+9+7+6)	PRI TO SEC
	2:1	1:1	1:1	409.5μH ±5%	10μH MAX	1875V AC 1mA 6s
	DCR				CWW@100KHz 0.1V	THD@30KHz,4V
	(10-7)	(9-6)	(1-4)	(2-5)	(1-10) (tie1+2+4+5,10+9+7+6)	-
	0.35Ω MAX	0.35Ω MAX	1.0Ω MAX	1.0Ω MAX	30PF MAX	-80 MAX

### DIMENSIONS (unit: inch/mm):

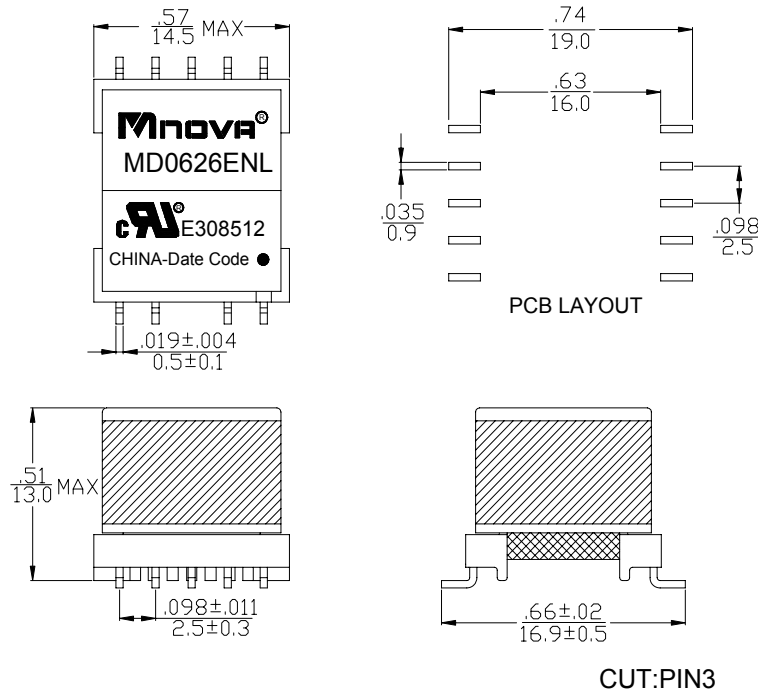

### SCHEMATICS:

