


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot	
MP0209FNL	(1-4):(8-5),(tie2+3,6+7)	(1-4), (tie2+3)	(1-4),(tie2+3,6+7)	PRI TO SEC	
	2:1	800μH±10%	1.5μH MAX	1875VAC 0.5mA 1s	
	DCR		CWW @ 100KHz 0.1V		
	(1-4) ,(tie2+3)	(8-5), (tie7+6)	(1-8),(tie1+2+3+4,5+6+7+8)		
	3.0Ω MAX	2.0Ω MAX	50pF MAX		

DIMENSIONS (unit: inch/mm):

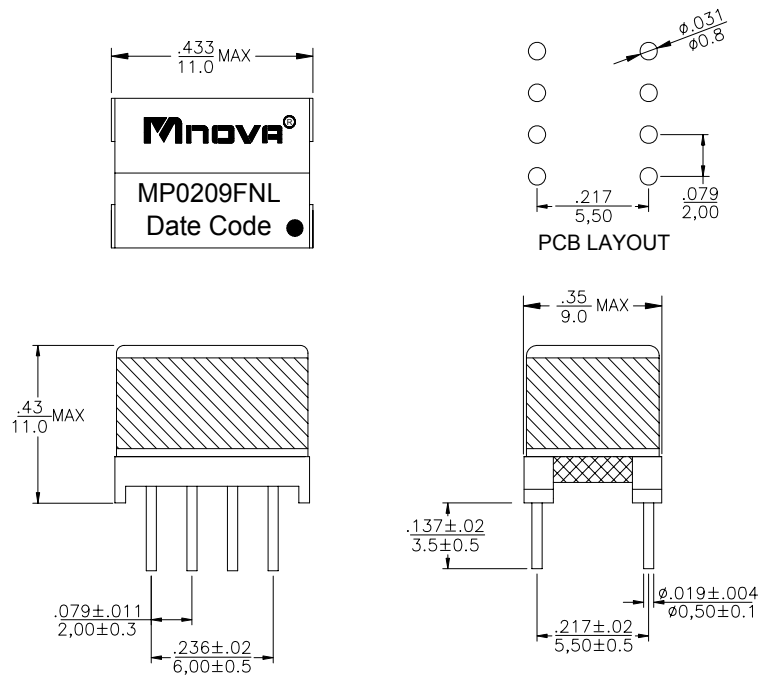

SCHEMATICS:

