


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



### Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot
MD0487WNL	(8-5) : (1-4)	(8-5)	(8-5),(tie1+4)	PRI TO SEC
	1.5:1 ±2%	100µH±10%	0.45µH MAX	1500V AC 1mA 2S
	<b>DCR</b>		<b>CWW @ 100KHz 0.1V</b>	<b>THD@ 30KHz 3.162V</b>
	(1-4)	(8-5)	(1-8)	-
	310mΩ MAX	385mΩ MAX	45pF MAX	-75dB MAX

### DIMENSIONS (unit: inch/mm):

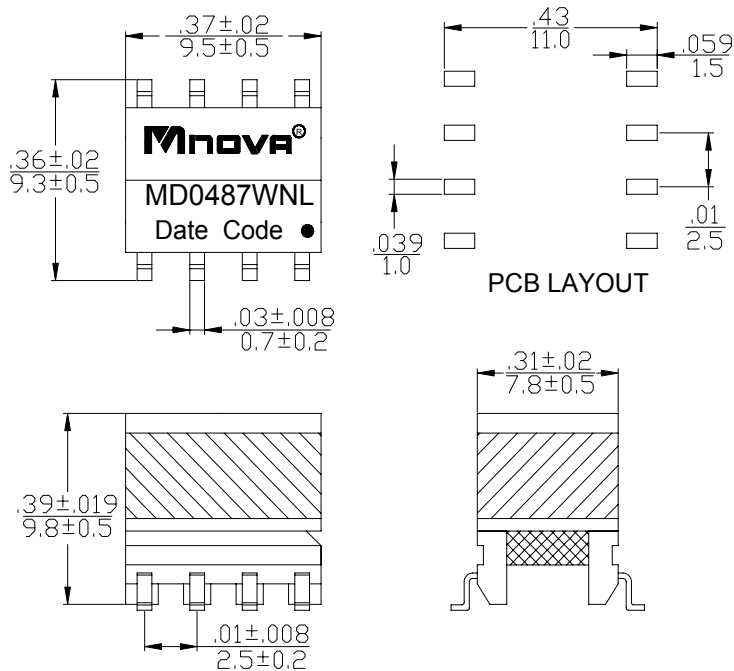

### SCHEMATICS:

