


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile: Wave soldering
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C

Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@1MHz 1V (μH MIN)	D.C.R (mΩ MAX)		Hi-pot (Vrms)
	(1-2):(3-4):(5-6)	(5-6)	(3-4)	(1-2) =(5-6)	PRI TO SEC
MD1842Q	3:2:3	8	65	100	3000

Dimensions (unit: inch/mm)

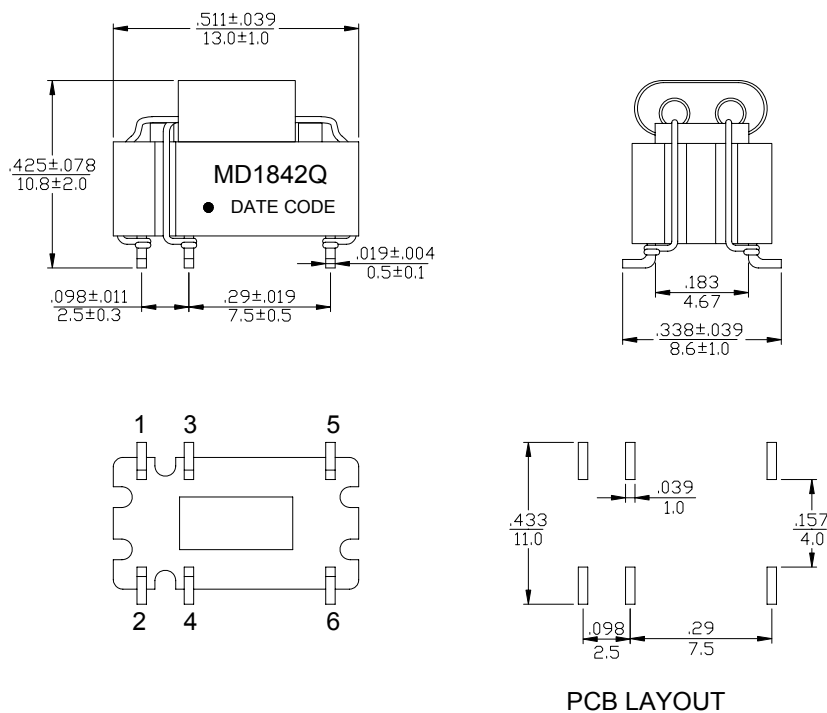

Schematics

