


- IEC60950 Compatible
- High insulation type High efficiency
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C



Electrical Specifications @ 25°C

P/N	T/R				OCL @ 100KHz 0.1V			Hi-Pot	
MD0435F	(1-8):(2-7)	(1-8):(8-2)	(1-8):(3-5)	(1-8):(5-4)	(3-4)			PRI TO SEC	
	1:1	1:1	1:0.38	1:0.38	3.38μH MAX			500VAC 1mA 5S	
	LL @ 100KHz 0.1V				DCR				
	(3-4),(tie1+2+7+8)				(1-8)	(3-5)	(8-2)	(2-7)	(5-4)
	0.16μH MAX				0.40 Ω MAX	0.06 Ω MAX	0.44 Ω MAX	0.48 Ω MAX	0.07 Ω MAX

DIMENSIONS (unit: inch/mm):

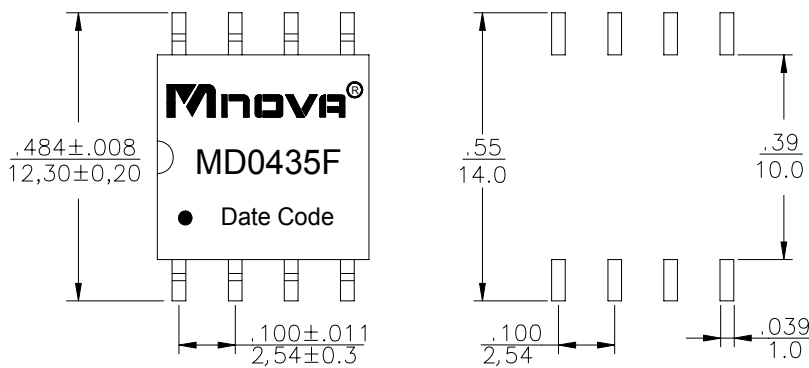

PCB LAYOUT

SCHEMATICS:

