


- COMMON MODE CHOKE
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



Electrical Specifications @ 25°C

P/N	T/R @ 10KHz 0.1V	DCR	OCL @ 10KHz 0.1V	Rated current	Hi-Pot
MS2708	TX&RX	all connected pins	TX&RX	TX&RX	PRI TO SEC
	1 : 1±5%	0.8Ω MAX	17mH MIN	1.0A MAX	1500V AC 1mA 6S

DIMENSIONS (unit: inch/mm):

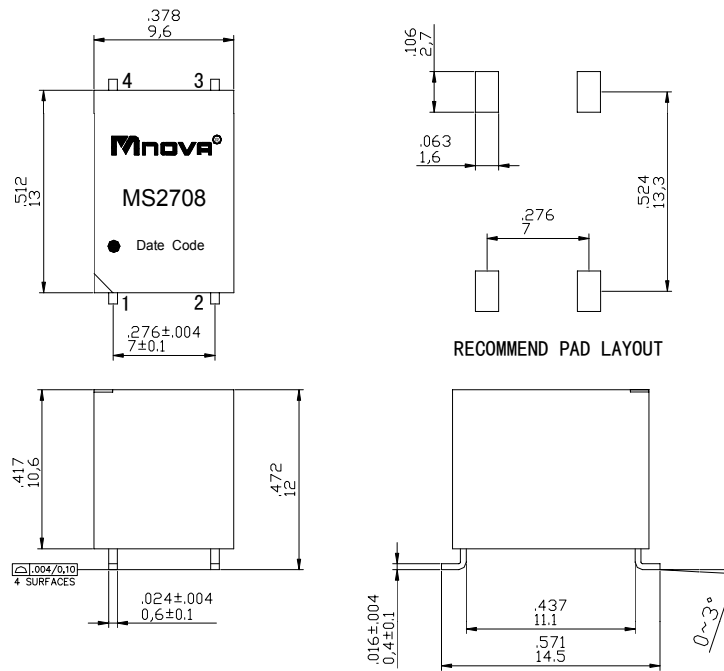

Note: unless other specified all tolerance are: $\pm \frac{.012}{0,3}$

SCHEMATICS:

